

## High Current LED Driver

### ❖ GENERAL DESCRIPTION



LED1113/A is a low dropout current regulator for high current LED Driver. The output current was decided by external resistor. Build-in thermal shutdown and current limit protection function.

### ❖ FEATURES

- 500mA Maximum Output Current.
- 2% Output Current Setting Accuracy.
- External Resistor Allows Designer to set Current.
- Output current limiting
- Built-in thermal shutdown
- Packages: SOT89-3L
- High Power LED Driver
- RoHS and Halogen free compliance.

### ❖ PIN ASSIGNMENT

The package of LED1113 is SOT89-3L; the pin assignment is given by:

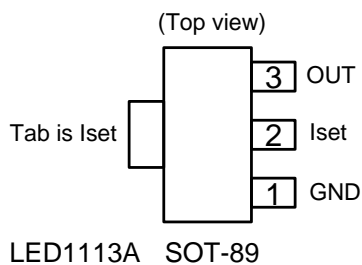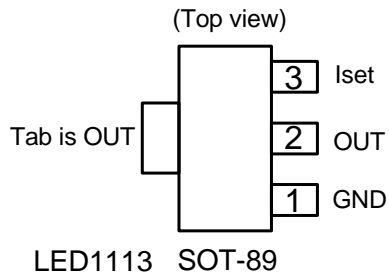

Name	Description
GND	Ground
Iset	Output current set input. Connect a resistor from I <sub>SET</sub> to GND to set LED current.
OUT	Output pin. The LEDs are connected from these pins to VCC.

❖ ORDER/MARKING INFORMATION

Order Information	Top Marking
<p style="text-align: center;"><b>LED1113 X X X</b></p> <p>Pin Define      Package      Packing</p> <p>Blank: LED1113    F: SOT89-3L    Blank: Bag</p> <p>A: LED1113A           A : Taping</p>	<p style="text-align: center;">1 1 1 3 → Part number</p> <p style="text-align: center;">L Y W X → ID code:internal</p> <p>Output Type F : LED1113 E : LED1113A</p> <p>WW: 01~26(A~Z) 27~52(a~z)</p> <p>Year: 8=2018 9=2019 B=2020 C=2021 D=2022 Z=2044</p>

❖ ABSOLUTE MAXIMUM RATINGS

Characteristics	Symbol	Rating	Unit
Output Voltage	V <sub>OUT</sub>	28	V
Operating Junction Temperature Range	T <sub>OP</sub>	0 to +125	°C
Maximum junction Temperature	T <sub>J</sub>	150	°C
Power Dissipation (PCB=FR4, 2 inch sq.) T <sub>A</sub> =25°C, T <sub>J</sub> =125°C (SOT89)	P <sub>D</sub>	1110	mW
Storage Temperature	T <sub>ST</sub>	-65 to +150	°C


❖ ELECTRICAL CHARACTERISTICS

(Under Operating Conditions, T<sub>J</sub>=25°C)

Characteristics	Conditions	Min	Typ	Max	Units
Output Voltage	I <sub>OUT</sub> =5mA	2.45	-	26	V
Output Sink Current	V <sub>CC</sub> -V <sub>LED</sub> =V <sub>OUT</sub> >2.5V, I <sub>OUT</sub> =5mA	500			mA
V <sub>SET</sub> Voltage	V <sub>CC</sub> -V <sub>LED</sub> =V <sub>OUT</sub> >2.5V I <sub>OUT</sub> =5mA	1.225	1.250	1.275	V
Dropout Voltage (V <sub>OUT</sub> -V <sub>SET</sub> )	I <sub>OUT</sub> = 500mA, ΔV <sub>SET</sub> =2%V <sub>SET</sub>	-	1.1	1.2	V
Output Current (Note 1,2)	1W LED      R <sub>SET</sub> =3.6Ω/0.5W	340	347	354	mA
	0.5W LED    R <sub>SET</sub> =7.2Ω	170	174	177	mA
	20mA LED    R <sub>SET</sub> =60Ω	20.4	20.8	21.3	mA
Current Limit	V <sub>OUT</sub> > 5V	0.8	-	-	A
θ <sub>JA</sub> Thermal Resistance Junction-to-Ambient	SOT89	-	300	-	°C/W
θ <sub>JC</sub> Thermal Resistance Junction-to-Case	SOT89(PCB=FR4, 2 inch sq.)	-	90	-	°C/W

❖ APPLICATION CIRCUIT

(1) AC Input

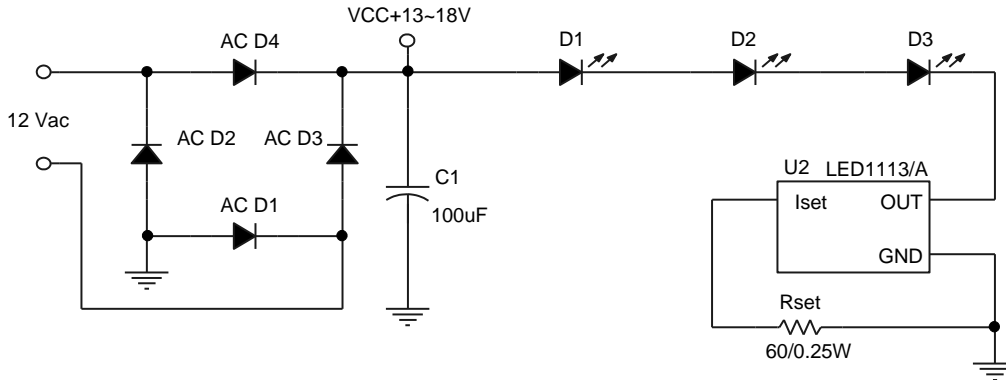

$$I_{OUT} = 1.25V / 60 = 21mA$$

$$V_{OUT} \geq 2.5V$$

$$1. 13V - V_{LED} - V_{SET} = 1.25V$$


$$IC's PD = (1.25 * 0.02) = 0.03W$$

$$2. 18V - V_{LED} - V_{SET} = 6.25V$$

$$IC's PD = (6.25 * 0.02) = 0.13W$$

$$V_{LED} = 10.5V (3.5V * 3LED)$$

(2) DC Input

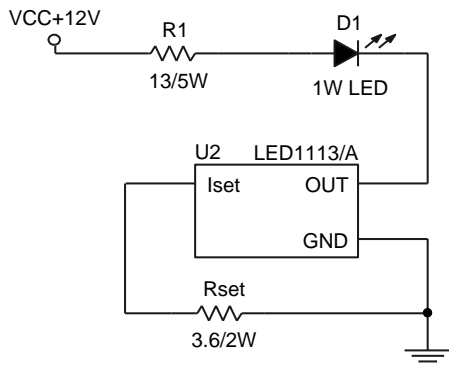

$$I_{OUT} = 1.25V / 3.6 = 347mA$$

$$V_{OUT} = 2.5V$$


$$1. R1 = 13, VR1 = 4.51V$$

$$R1 \quad PC = 4.51 * 0.347 = 1.57W$$

$$2. 12V - VR1 - V_{LED} - V_{SET} = 2.74V$$

$$IC \quad PD = (2.74 * 0.347) = 0.95W$$

$$V_{LED} = 3.5V$$

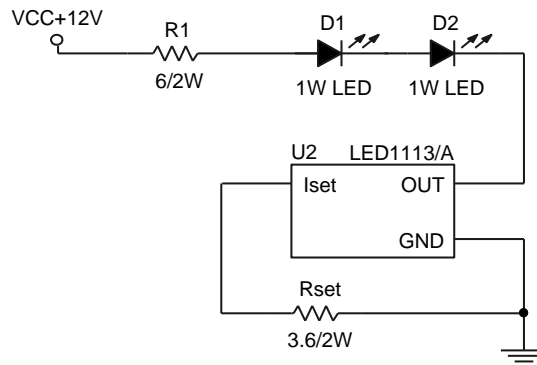

$$I_{OUT} = 1.25V / 3.6 = 347mA$$

$$V_{OUT} = 2.5V$$


$$1. R1 = 6, VR1 = 2.08V$$

$$R1 \quad PC = 2.08 * 0.347 = 0.73W$$


$$2. 12V - VR1 - V_{LED} - V_{SET} = 1.67V$$

$$IC \quad PC = 1.67 * 0.347 = 0.58W$$

$$V_{LED} = 7V$$


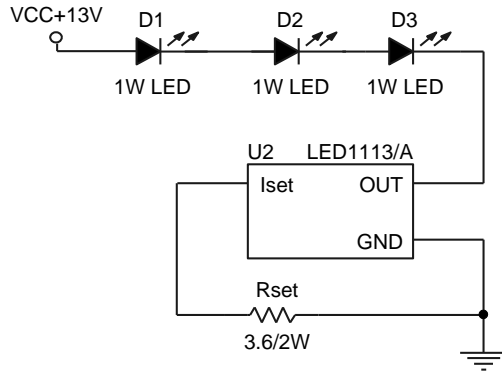


$I_{OUT} = 1.25V / 3.6 = 347mA$   
 $V_{OUT} = 2.5V$   
 $13V - V_{LED} - V_{SET} = 2.02V$   
 $IC\ PC = 1.25 * 0.347 = 0.4W$   
 $V_{LED} = 10.5V\ (3.5V * 3LED)$


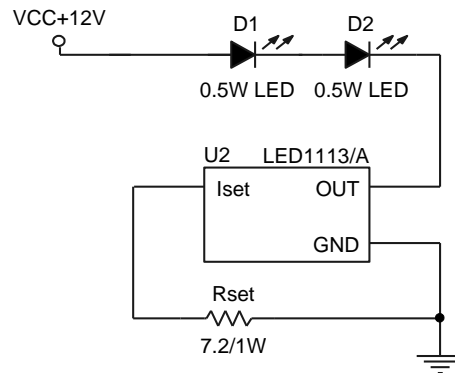


$I_{OUT} = 1.25V / 7.2 = 174mA$   
 $V_{OUT} = 2.5V$   
 $12V - V_{LED} - V_{SET} = 3.75V$   
 $IC\ PC = 3.75 * 0.174 = 0.65W$   
 $V_{LED} = 7V$

❖ TYPICAL CHARACTERISTICS

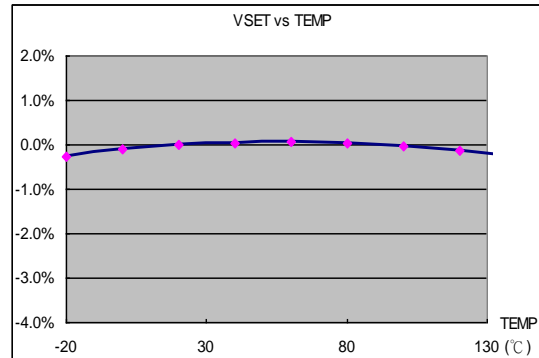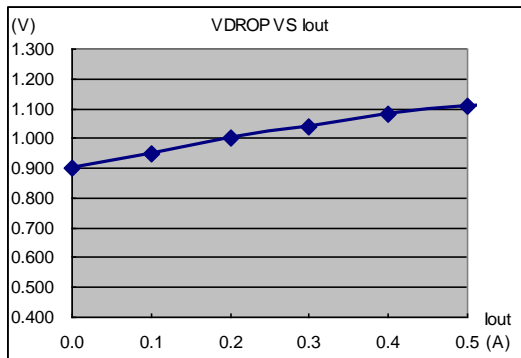

❖ PACKAGE OUTLINES

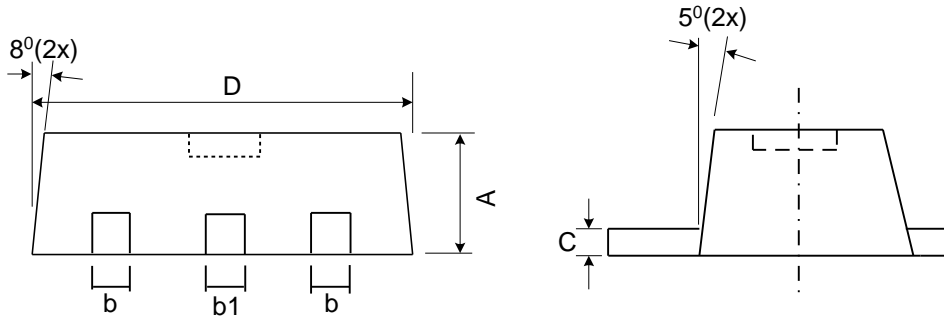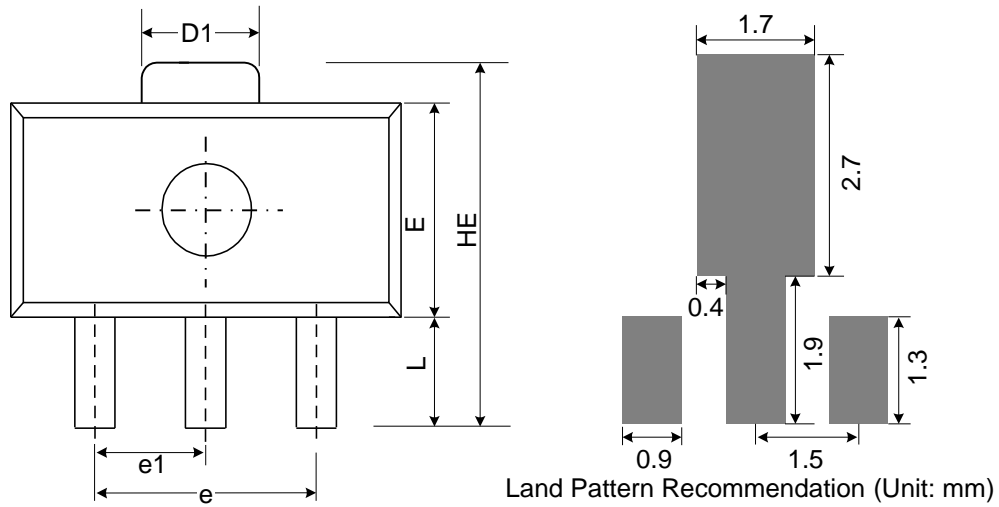

Symbol	Dimensions in Millimeters			Dimensions in Inches		
	Min.	Nom.	Max.	Min.	Nom.	Max.
A	1.40	1.50	1.60	0.055	0.059	0.063
b	0.36	0.42	0.48	0.014	0.017	0.019
b1	0.44	0.50	0.56	0.017	0.02	0.022
C	0.35	0.40	0.44	0.014	0.016	0.017
D	4.40	4.50	4.60	0.173	0.177	0.181
D1	1.35	1.59	1.83	0.053	0.063	0.072
e	3.0 BSC			0.118 BSC		
e1	1.5 BSC			0.059 BSC		
E	2.29	2.45	2.60	0.09	0.097	0.102
HE	3.94	4.10	4.25	0.155	0.161	0.167
L	0.80	1.00	1.20	0.031	0.04	0.047

JEDEC outline: TO-243 AB

❖ Carrier tape dimension

SOT89-3L

